


Embeddable RFID Tags



Short or Long Run Orders • Unique Solutions • Harsh Environment Encapsulations

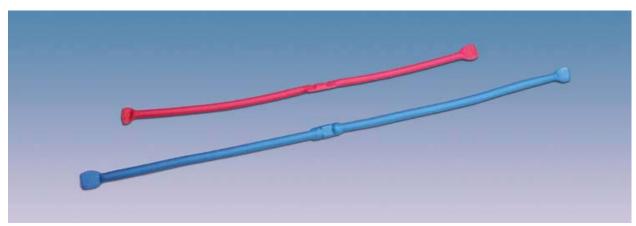

Part Number: WF-SM-IN01, WF-SM-IN02

Size: 4.5" x .125", 6" x .125"

Standard Frequencies: 915 MHz UHF

Approx. Read Range: Variable depending on encapsulation

Communication Protocol: EPC Class1 Generation 2

Applications: Embedded in Concrete, Wood, Plastics, Carbon composites, for critical asset tracking and location marketing.

Description: These durable wire inlays can be embedded inlabels, pallets, concrete, or nearly any other substance and still provide reliable performance. Their flexible design allows them to be used in a wide variety of form factors. Because of their unique design, they can even provide a 360° read profile to reduce orientation sensitivity. **Antenna size can be adjusted to allow custom read ranges and frequencies can be adjusted for your applications.**

Contact Information

Call today for all your custom RFID needs:

David Kennedy, VP and Gen. Mgr. Phone: (519) 268-7604;

E-mail: david.kennedy@falkensecurenetworks.com

Web: www.falkensecurenetworks.com