
### INTERACTIVE PEN DISPLAY



# For Fast and Intuitive Digital Workflows

#### Work Directly On Screen

The DTU-1631 combines a 15.6", 16:9 widescreen LCD with Wacom's patented, cordless, battery-free pen technology. Use the pen directly on the display surface to enjoy the benefits of an all-digital workflow while simulating a pen-on-paper experience. The DTU-1631 interactive pen display is an excellent choice for people who use applications that benefit from working with pen directly on screen, but desire a compact form factor. It can be utilized for redlining and signing documents, annotating and sharing presentations, completing forms, creating hand-drawn imagery, and capturing handwritten notes.

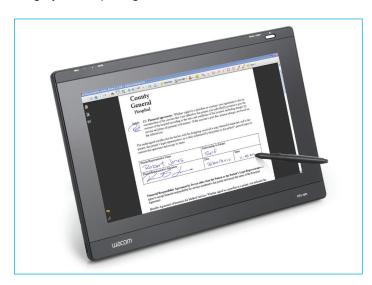

#### **Key Features**

- 15.6" display with HD (1366 x 768) resolution.
- Built-in DVI-I pass-thru connector handles either digital or analog input and allows mirroring directly from pen display to a projector or another display.
- Internal scaler will take video input signals of different resolutions and display them in their native resolution and aspect ratio.
- Internal USB hub with two user-accessible USB ports to provide easy access to your favorite USB devices.
- Completely flat surface for maximum comfort while working.
- Adjustable stand that allows for 19 to 72 degrees of incline.
- Pen that supports 512 levels of pressure-sensitivity on the pen tip. Also includes programmable side switches and an eraser.
- Display Toggle feature allows control and navigation of other monitors in a multiple-monitor environment.
- Radial Menu feature (programmable via the Control Panel) puts additional commands at user's fingertips.

#### Contact info

## FALKEN Secure Networks Inc 647-930-7373 (CANADA)

sales@falkensecurenetworks.com

General		Display	
Dimensions	16.5"W x 11.1"H x 1.9"D (excluding stand)	Туре	TFT active-matrix LCD
Weight	9.5 lbs. (including stand)	Screen size	15.6" diagonal
Data port	USB	Display area	13.63" x 7.70"
Graphics input/output	Analog RGB or digital DVI	Resolution	1366 x 768 pixels
Stand adjustability	19° to 72° incline	Aspect ratio	16:9
Mounting system	VESA 75mm	Number of colors	16.7 million
Pen storage	Integrated pen holder	Brightness	255 cd/m <sup>2</sup>
Power supply input	100-240 VAC 50-60 Hz	Contrast ratio	400:1
Warranty	2 years	Work surface	Completely flat glass
Tablet		Pen	
Technology	Patented electromagnetic resonance method	Туре	Pressure sensitive, cordless, battery-free
Active area	13.63" x 7.70"	Switches	Tip switch, 2 side switches, eraser
Resolution	2540 lines per inch	Pressure levels	512
Coordinate accuracy	+/- 0.5mm	Grip	Contoured
Reading height	5 mm	Tether	24" nylon fiber