



FALKEN
Secure Networks

Durable RFID tags and labels for any environment



Secure Specialty Labels

Short or Long Run Orders • Unique Solutions • Harsh Environment Encapsulations



Part Number: WF-SM-15

Size: 4.25" x 1.25"

Standard Frequencies:
915 MHz UHF

Approx. Read Range: 15 ft.

Communication Protocol:
EPC Class1 Generation 2


Applications: Retail,
Liquids, Metal Mount, Food
and Beverage

Description: The unique
construction of this tag
allows use with liquids or
other hard to read materials.

Built with [AuthentiCal™](#)
[Secura-T technology](#), the
tag is tamper-evident and is

perfect for retail and food and beverage environments.

Sizes can be adjusted to allow other inlays, frequencies and applications.

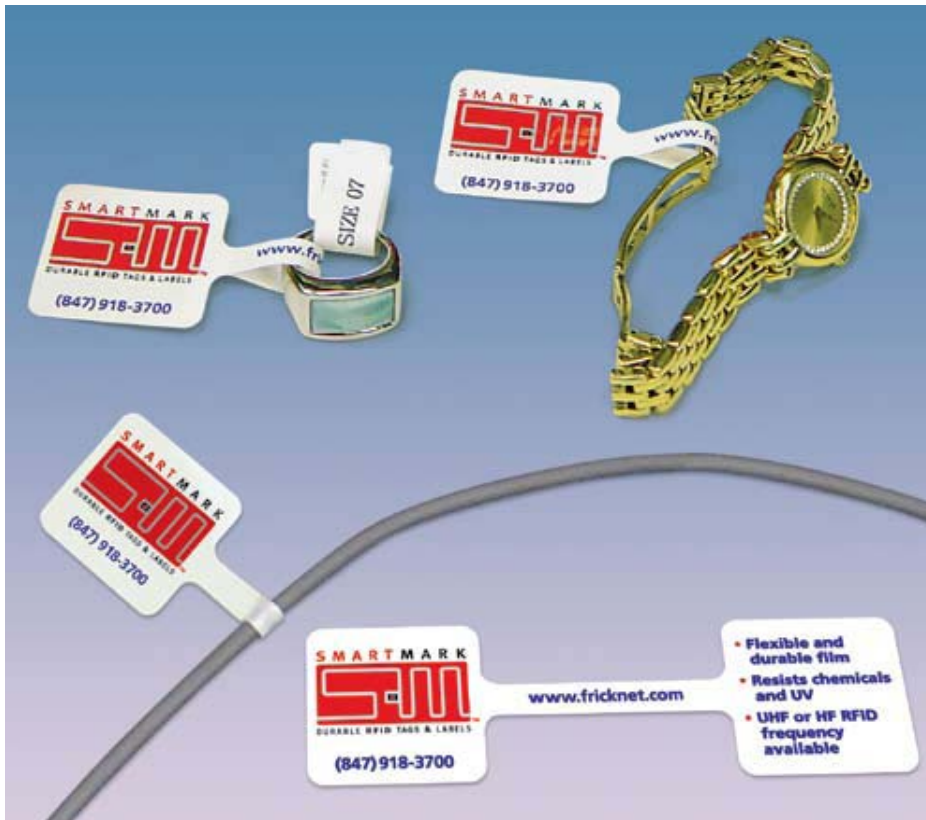

Part Number: WF-SM-16

Size: 4.25" x 1.25"

Standard Frequencies:
915 MHz UHF

Approx. Read Range: 2.5 ft.

Communication Protocol:
EPC Class1 Generation 2

Applications: Retail, Jewelry,
Cables, Metal Mount

Description: Designed to track high value items or identify cable runs, this tag can be used on metallic objects. When built with [AuthentiCal™ Secura-T technology](#), the tag is tamper-evident and is perfect for retail environments. Your serialized barcodes or logo can be added to positively identify cable runs.

Sizes can be adjusted to allow other inlays, frequencies and applications.

Contact Information:

Call today for all your custom RFID needs:

David Kennedy, VP and Gen. Mgr. Phone: (519) 268-7604;

E-mail: david.kennedy@falkensecurenetworks.com

Web: www.falkensecurenetworks.com